

Mode Field Adaptor

Features


Low insertion loss
High Efficiency
stability and reliability

Application:

Wave Fiber Laser
High-Power Laser Equipment
Experimental tests and other areas

Description	Parameter	Unit	Note
Type	MFA		
Signal Wavelength	1064	nm	
Signal Input Fiber	Nufern-FUD-3583-SM-GDF-10/125-0.08/0.46NA	μm	
Signal Output Fiber	Hi1060	μm	
Signal Insertion Loss	0.2	dB	
M ²	-		
Power Handling	10	W	
ER	-	dB	
Operating Temperature	-5-+70	°C	
Storage Temperature	-20-+70	°C	
Fiber Length	1.0	m	
Dimensions	100*15*10	mm	glass tube

Mechanical Dimension

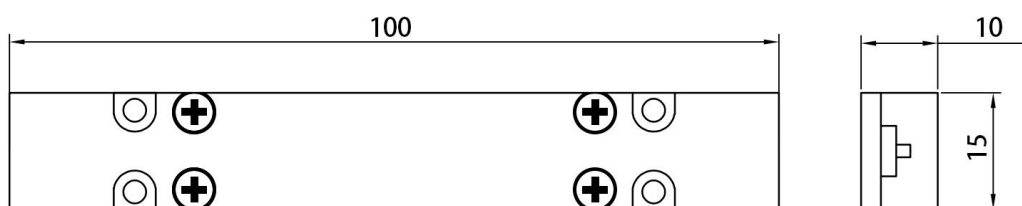

Ordering Information

GCMFA-1x1-F-1064-10W-100x15x10-1.0m