

PM Mode Field Adaptor

Features


Low insertion loss
High Efficiency
stability and reliability

Application

Wave Fiber Laser
High-Power Laser Equipment
Experimental tests and other areas

Description	Parameter	Unit	Note
Type	PMMFA	-	
Signal Wavelength	1064	nm	
Signal Fiber	Nufern-PLMA-GDF-10/125-M-0.07/0.46NA	μm	
Output Fiber	Nufern-PM-GDF-30/250-0.06/0.46NA	μm	
Signal Insertion Loss	0.5	dB	
M ²	1.1		
Power Handling	30	W	
ER	18	dB	
Operating Temperature	-5-+70	℃	
Storage Temperature	-40-+85	℃	
Operating Humidity	5-95	%RH	
Fiber Length	0.6	m	
Dimensions	70x12x8	mm	Handling power is different with PKG

Mechanical Dimension

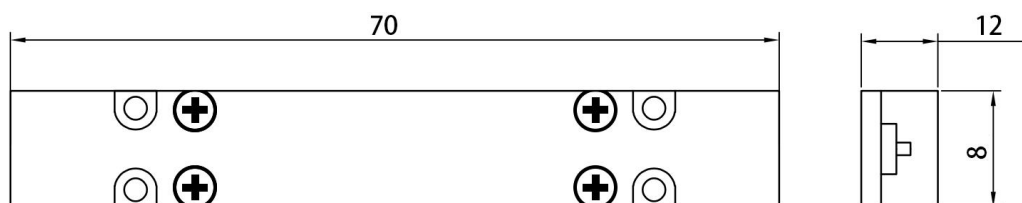

Ordering Information

GCPMMFA-1x1-F-1064-30W-70x12x8-0.6m