

Cladding Power Stripper

Features:


Low insertion loss
High Efficiency
stability and reliability

Application:

Wave Fiber Laser
High-Power Laser Equipment
Experimental tests and other areas

Description	Parameter	Unit	Note
Type	CPS		
Pump Wavelength	800-2000	nm	
Signal Wavelength	1530	nm	
Input Fiber	Nufern-LMA-GDF-25/300-0.09/0.46NA	μm	
Signal Fiber	-	μm	
Output Fiber	Nufern-LMA-GDF-25/300-0.09/0.46NA	μm	
Signal Insertion Loss	0.05	dB	
Stripping Efficiency	20	dB	
Stripping Cladding Power	200	W	stripped average power
ER	-	dB	
Operating Temperature	-20-+70	℃	
Storage Temperature	40-+85	℃	
Fiber Length	1.0	m	
Dimensions	120x30x20	mm	

Mechanical Dimension

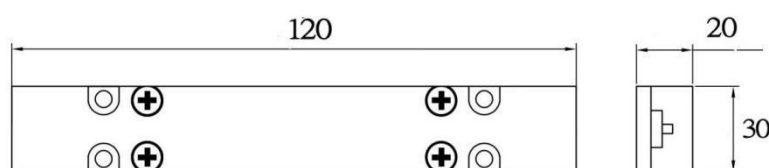

Ordering Information

GCPS-1x1-1-2-3-4-5-6-7

1	Pump Wavelength	976 - 976nm	Other - Specify
2	Signal Wavelength	1530-1530nm	Other - Specify
3	Input Fiber Type	Nufern-LMA-GDF-25/300-0.09/0.46NA	Other - Specify
4	Output Fiber Type	Nufern-LMA-GDF-25/300-0.09/0.46NA	Other - Specify
5	Stripping Power	200W -200 W power	
6	Package Type	X-120x30x20mm	Other - Specify
7	Fiber Length	1 m- 1meter	Other - Specify