

Cladding Power Stripper

Features:


Low insertion loss
High Efficiency
stability and reliability

Application:

Wave Fiber Laser
High-Power Laser Equipment
Experimental tests and other areas

Description	Parameter	Unit	Note
Type	CPS		
Pump Wavelength	915	nm	
Signal Wavelength	1080	nm	
Input Fiber	Nufern-LMA-GDF-20/400-M-0.065/0.46NA	μm	
Signal Fiber	-	μm	
Output Fiber	Nufern-LMA-GDF-20/400-M-0.065/0.46NA	μm	
Signal Insertion Loss	0.2	dB	
Stripping Efficiency	17	dB	Test by 915nm pump light
Stripping Power	-	W	
Pump Power Handling	800	W	Stripped average power
ER	-	dB	
Operating Temperature	-5-+70	°C	
Storage Temperature	-20-+70	°C	
Fiber Length	2.0	m	
Dimensions	120x43x31	mm	Handling power is different with PKG

Mechanical Dimension

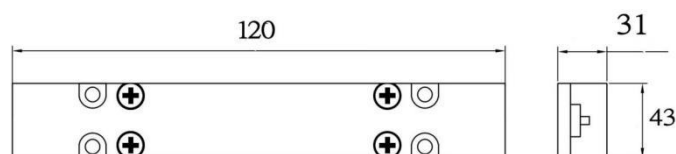

Ordering Information

GCPS-1x1-1-2-3-4-5-6-7

1	Pump Wavelength	915-915nm Other - Specify
2	Signal Wavelength	1080-1080nm Other - Specify
3	Input Fiber Type	Nufern-LMA-GDF-20/400-M-0.065/0.46NA Other - Specify
4	Output Fiber Type	Nufern-LMA-GDF-20/400-M-0.065/0.46NA Other - Specify
5	Stripping Power	800W -800 W power
6	Package Type	X-120x43x31mm Other - Specify
7	Fiber Length	1 m- 1meter Other - Specify