

PM Cladding Power Stripper

Features:


Low insertion loss
High Efficiency
stability and reliability

Application:

Wave Fiber Laser
High-Power Laser Equipment
Experimental tests and other areas

Description		Parameter	Unit	Note
Type		PMCPSP		
Pump Wavelength		916	nm	
Signal Wavelength		1064	nm	
Input Fiber		PM25/400 DCF 0.065/0.46NA	μm	
Signal Fiber		-	μm	
Output Fiber		PM25/400 DCF 0.065/0.46NA	μm	
Signal Insertion Loss		0.10	dB	
Stripping Efficiency		20	dB	
Signal Output Beam M ²		1.15	-	
Pump Power Handling		600	W	
ER		18	dB	
Operating Temperature		-5-+70	°C	
Storage Temperature		-20-+70	°C	
Fiber Length	Input	1.5	m	
	Output	4.0	m	
Dimensions		3x115	mm	Glass tube

Mechanical Dimension

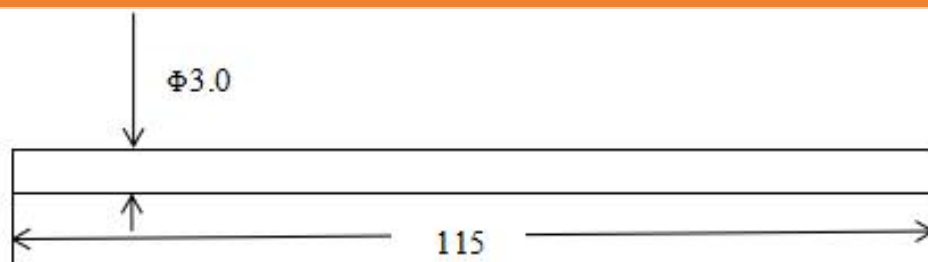

Ordering Information

GPMCPSP-1x1-1-2-3-4-5-6-7

1	Pump Wavelength	916 - 916nm Other - Specify
2	Signal Wavelength	1064 -1064nm Other - Specify
3	Input Fiber Type	PM25/400 DCF 0.065/0.46NA Other - Specify
4	Output Fiber Type	PM25/400 DCF 0.065/0.46NA Other - Specify
5	Power Handling	600W -600 W power
6	Package Type	X-3x115mm Other - Specify
7	Fiber Length	1 m- 1meter Other - Specify