

MFA+Cladding Power Stripper

Features


Low insertion loss
High Efficiency
stability and reliability

Application

Wave Fiber Laser
High-Power Laser Equipment
Experimental tests and other areas

Description	Parameter	Unit	Note
Type	MFA+CPS		
Direction	Forward / Backward		
Pump Wavelength	976	nm	
Signal Wavelength	1000~1100	nm	
Input Fiber	PLMA-GDF-10/125	μm	
Output Fiber	PLMA-GDF-25/250	μm	
Signal Insertion Loss	<0.5	dB	
Stripping Efficiency	≥20	dB	
Beam Quality Degradation	≤10	%	
Stripping Power	10	W	
ER	>18	dB	
Operating Temperature	-5-+75	℃	
Storage Temperature	-40-+85	℃	
Fiber Length	1.0	m	
Dimensions	Φ2.7x80	mm	glass tube

Mechanical Dimension

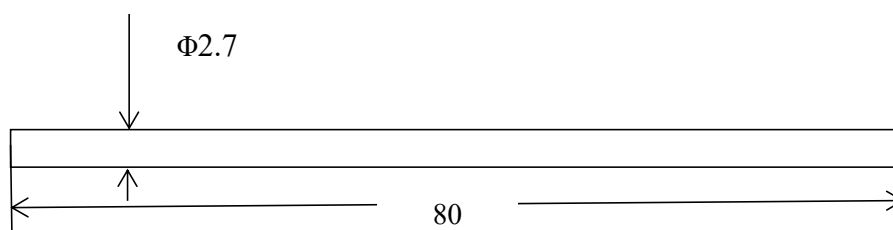

Φ2.7x80mm

Ordering Information

GCPMMFA+CPS-1000~1100-10W-Φ2.7x80(glass tube)-1.0m