

MFA+Cladding Power Stripper

Features


Low insertion loss
High Efficiency
stability and reliability

Application

Wave Fiber Laser
High-Power Laser Equipment
Experimental tests and other areas

Description	Parameter	Unit	Note
Type	MFA+CPS	-	
Direction	Forward	-	
Pump Wavelength	800-1000	nm	
Signal Wavelength	1064	nm	
Input Fiber	PM10/125 DCF 0.075/0.46NA	μm	
Output Fiber	PM25/250 DCF 0.06/0.46NA	μm	
Signal Insertion Loss	0.25	dB	
Stripping Efficiency	20	dB	
Signal Output Beam M ²	1.15	-	Input Signal M ² ≤ 1.1
Pump Power Handling	100	W	
ER	-	dB	
Operating Temperature	-5-+70	℃	
Operating Humidity	5-95	%RH	
Storage Temperature	-20-+70	℃	
Fiber Length	1.5	m	
Dimensions	Φ3.0x65	mm	

Mechanical Dimension

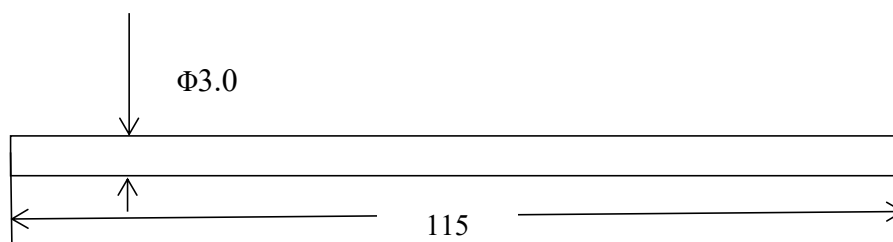

Φ3.0x115m

Ordering Information

GCPMMFA+CPS-1x1-F-1064-100W-Φ3.0x115-1.5m