

MFA+Cladding Power Stripper

Features


Low insertion loss
High Efficiency
stability and reliability

Application

Wave Fiber Laser
High-Power Laser Equipment
Experimental tests and other areas

Description	Parameter	Unit	Note
Type	MFA+CPS		
Direction	Forward / Backward		
Pump Wavelength	800-1000	nm	
Signal Wavelength	1064	nm	
Input Fiber	Nufern 10/125 DCF 0.075/0.46NA	μm	
Output Fiber	Nufern 25/250 DCF 0.065/0.46NA	μm	
Signal Insertion Loss	0.2	dB	
Stripping Efficiency	20	dB	
Beam Quality Degradation	-		
Stripping Power	-	W	
Pump Power Handling	30	W	
ER	-	dB	
Operating Temperature	-5-+70	℃	
Storage Temperature	-20-+70	℃	
Fiber Length	0.5	m	
Dimensions	Φ3.0x65	mm	glass tube

Mechanical Dimension

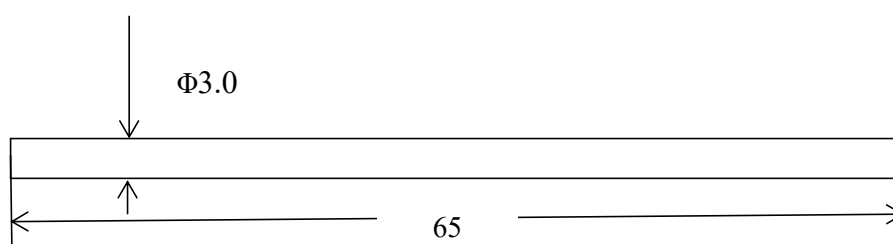

Φ3.0x65mm

Ordering Information

GCMFA+CPS-1x1-F/B-1064-30W-Φ3x65(glass tube)-0.5m